



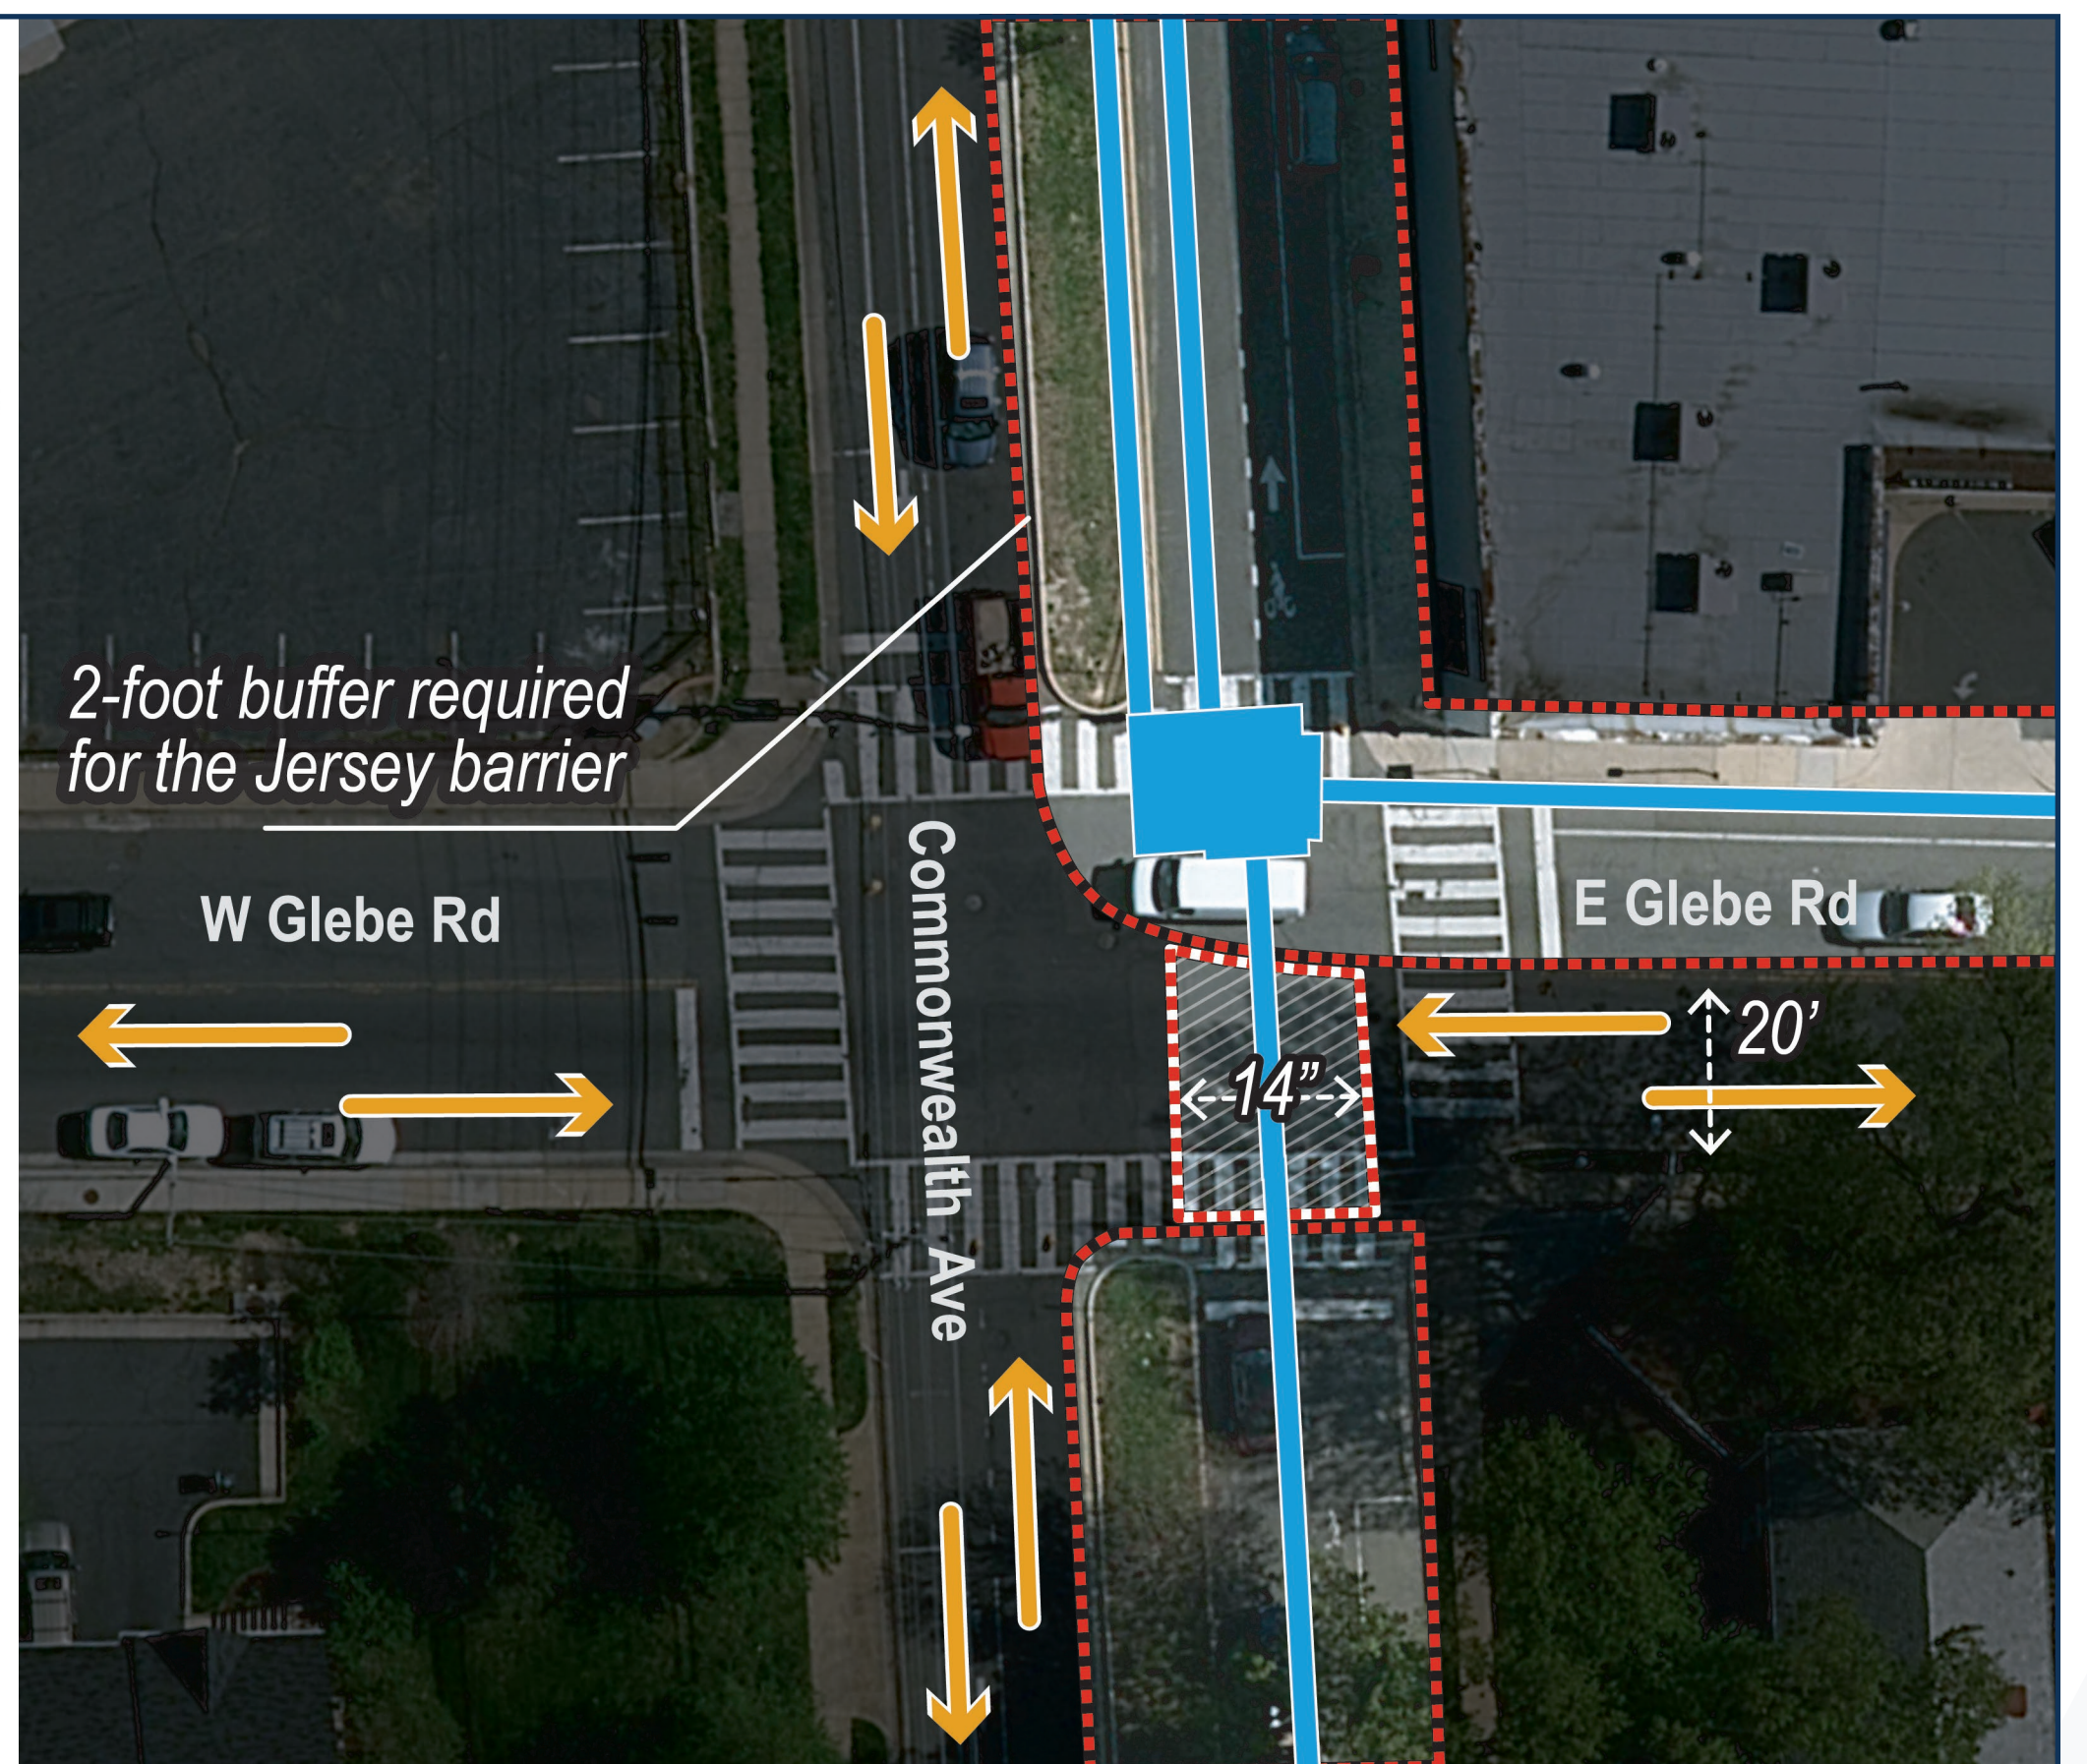


Area 4: Intersection of Commonwealth Ave and Glebe Rd

Description of Work


- ▶ **Junction box** - A large, cast-in-place concrete junction box on the northeast corner of the Commonwealth Ave/Glebe Rd intersection will capture stormwater from Glebe Rd and the southern part of Commonwealth Ave and direct it north to the outfall
- ▶ **Box culverts**
 - Double 7' x 8' box culverts on the north side of Commonwealth Ave
 - Single 8' x 7' box culvert on the south side of Commonwealth Ave
 - 7' x 7' box culvert on E Glebe Rd

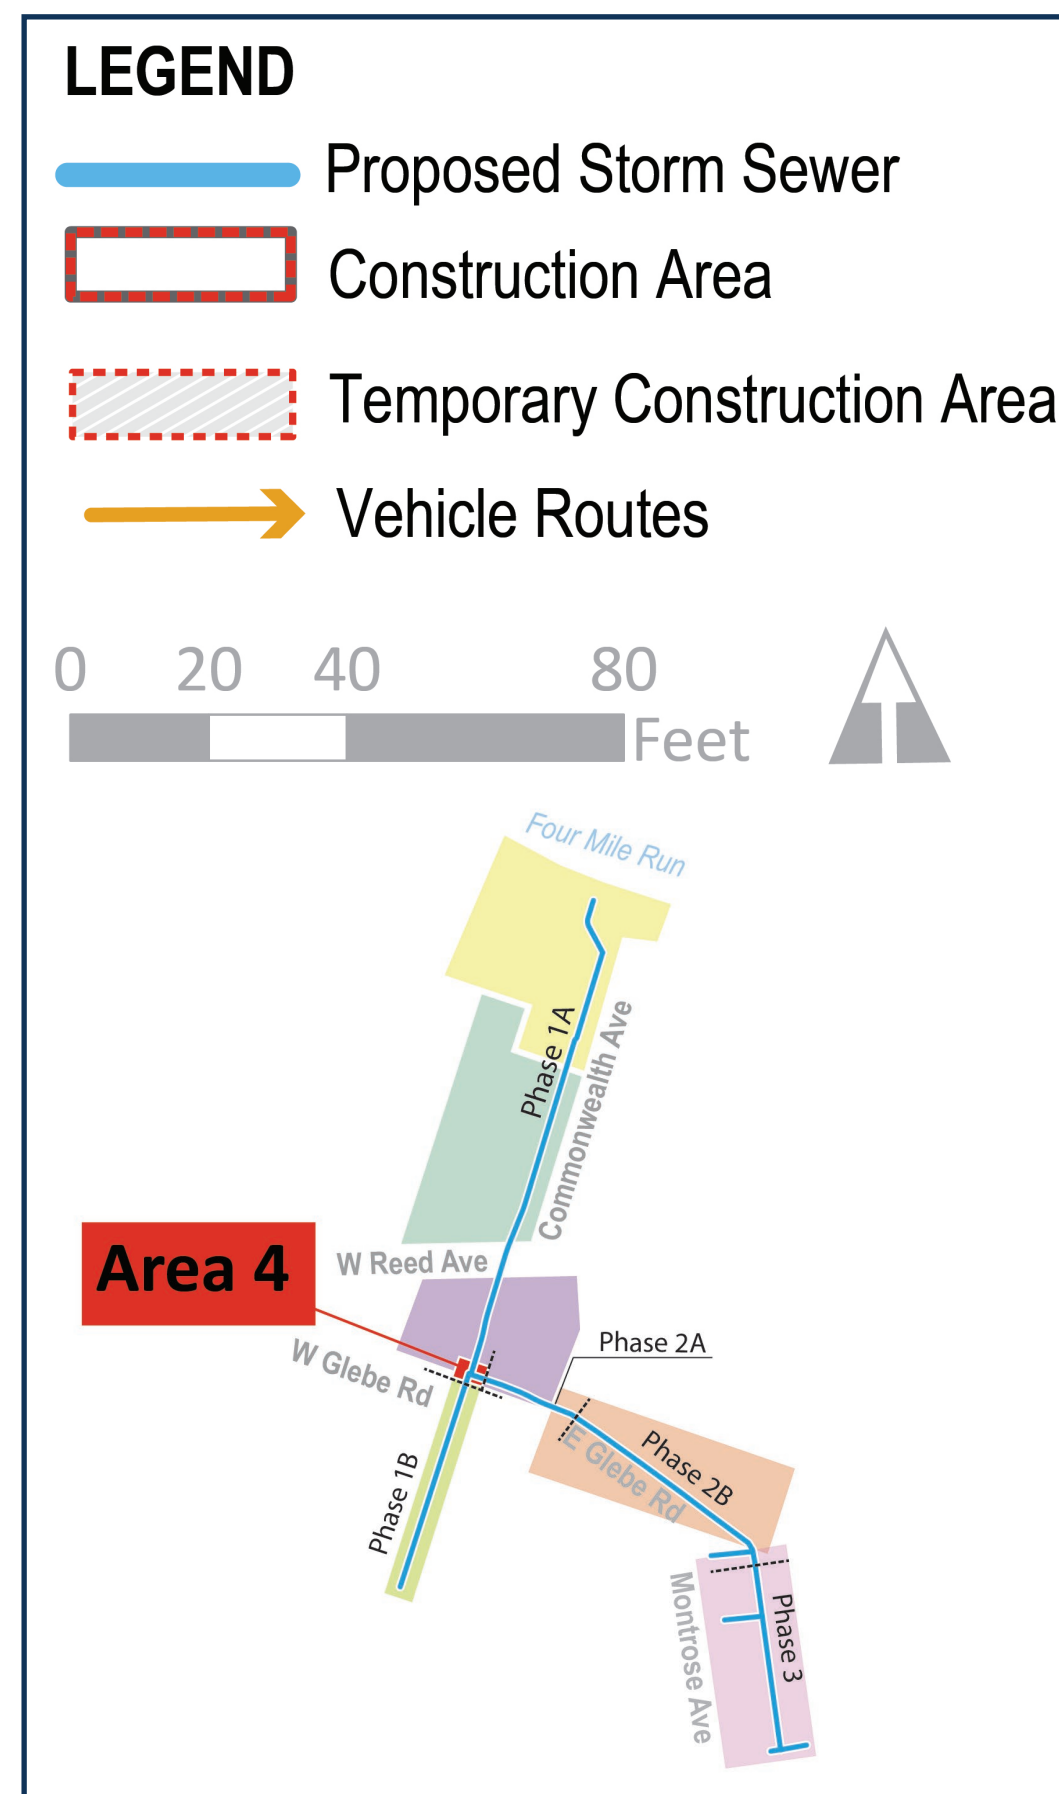


Travel Lanes Now – Commonwealth Ave, facing north

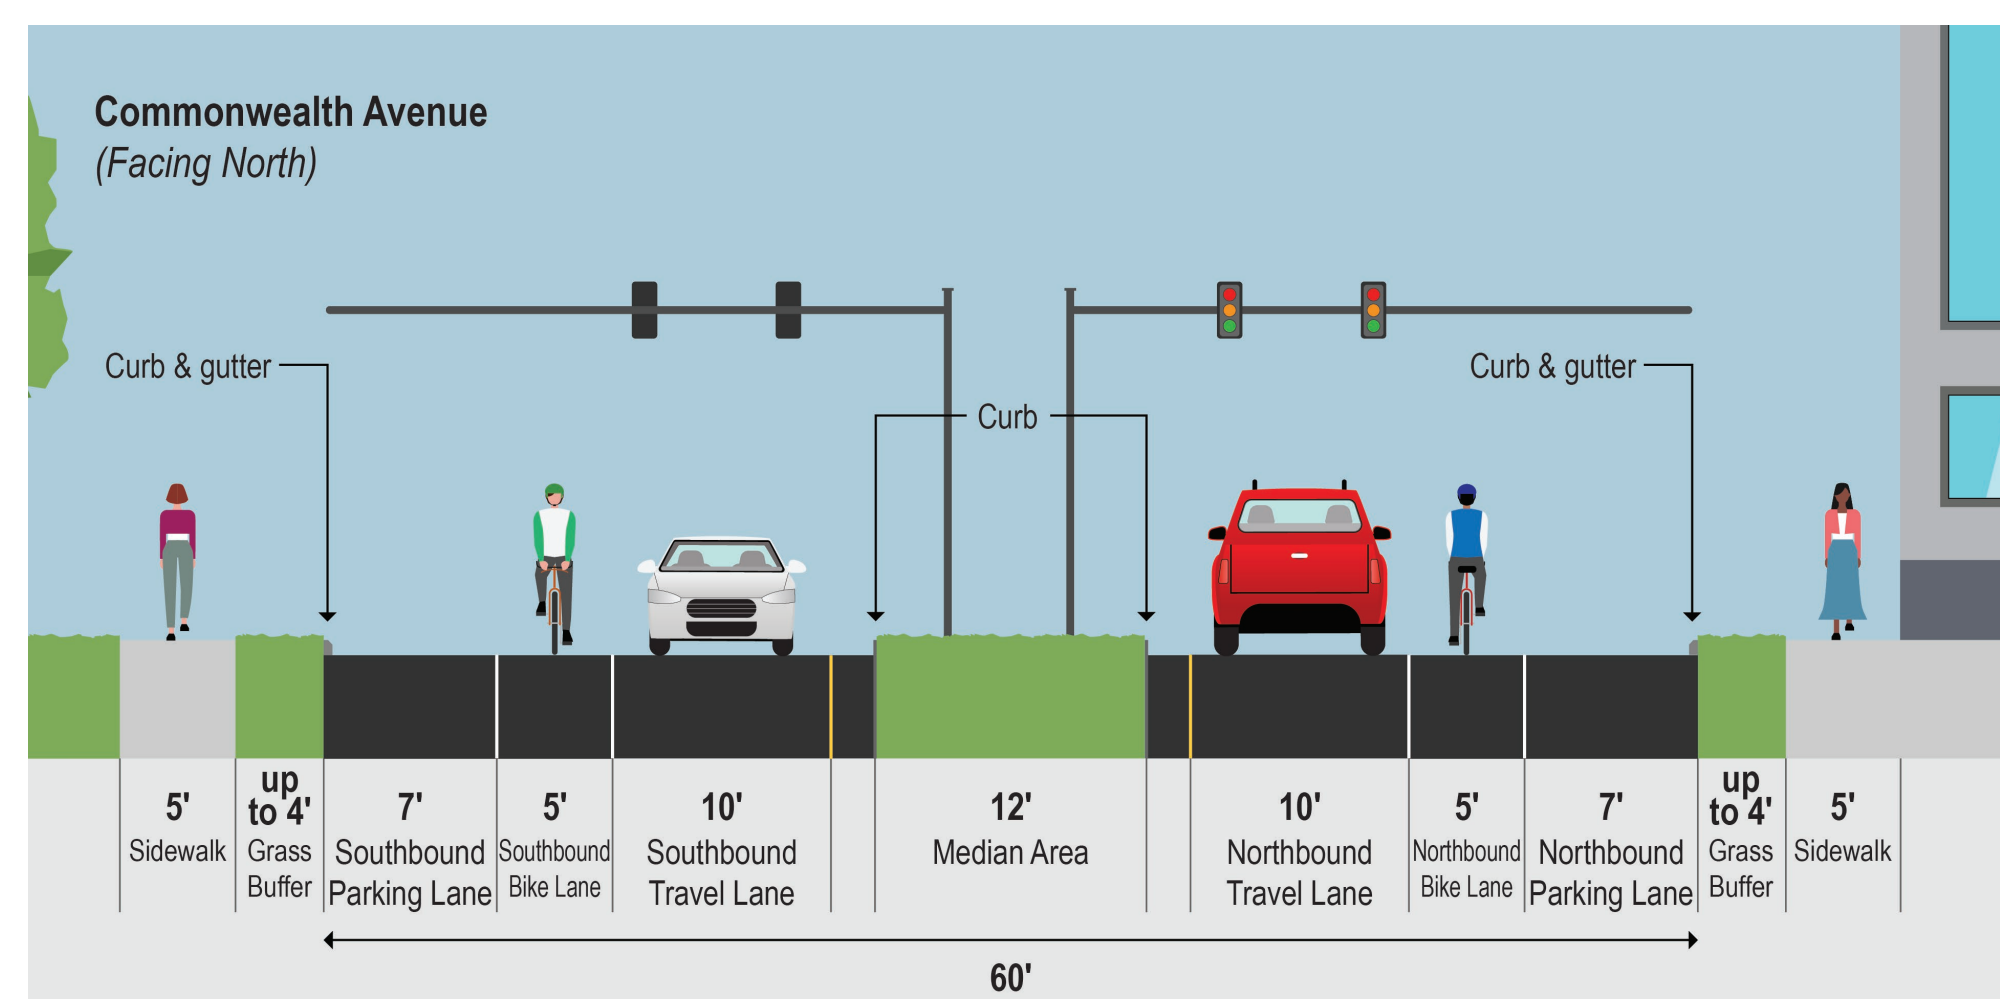


Travel Lanes Now – W Glebe Rd, facing east

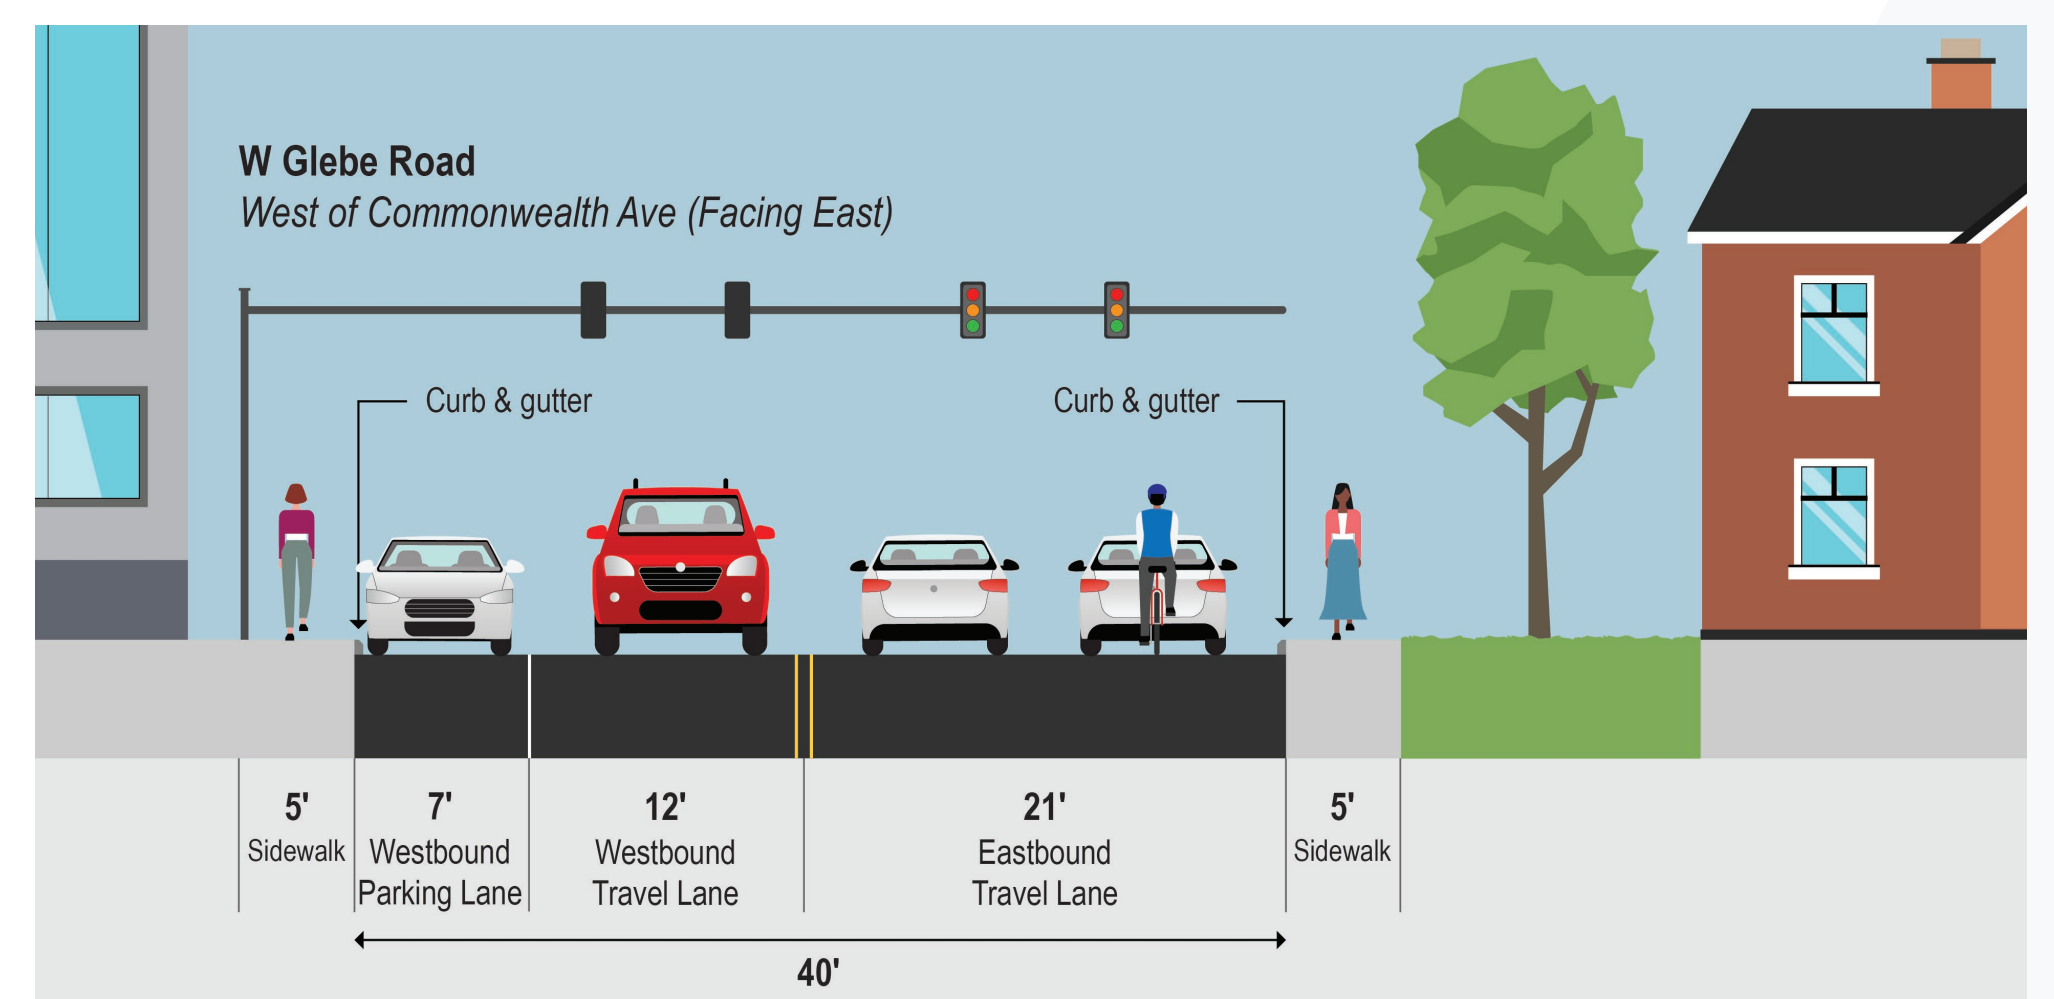

Travel Lanes During Construction – Commonwealth Ave, facing north

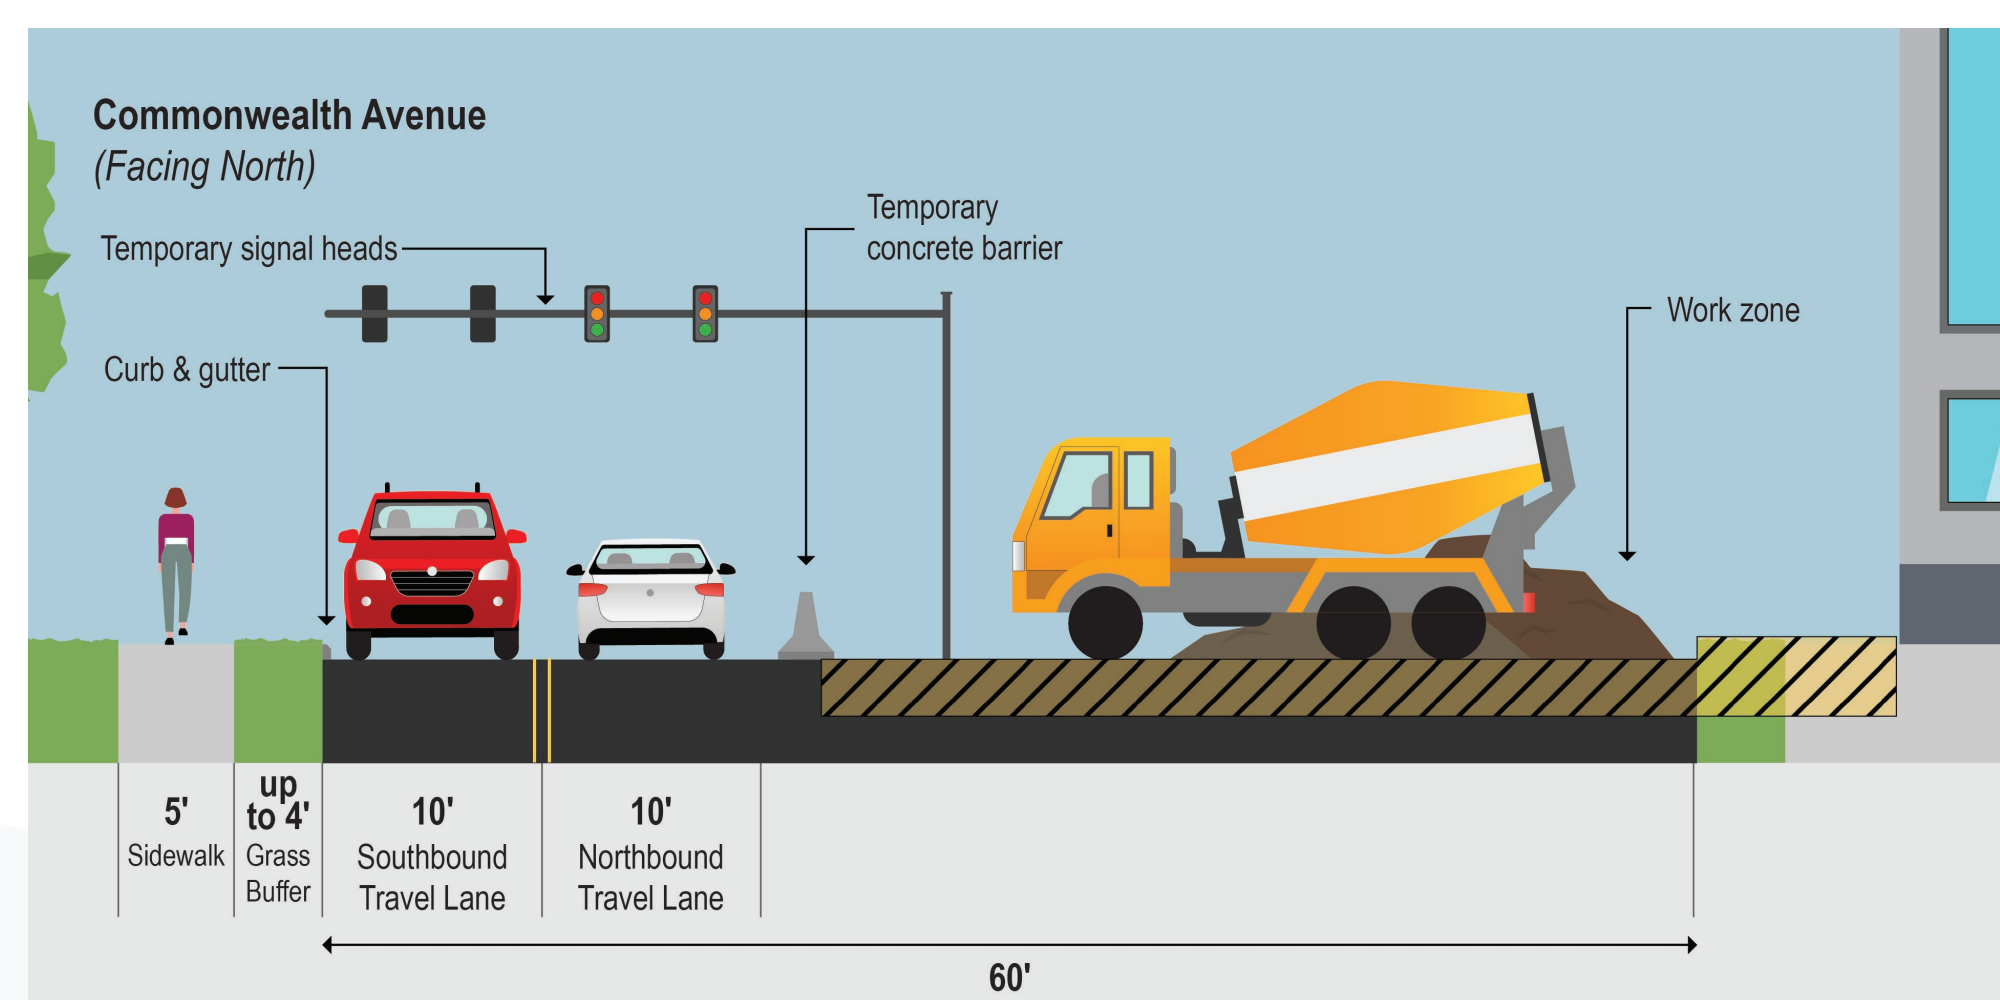

Travel Lanes During Construction – W Glebe Rd, facing east

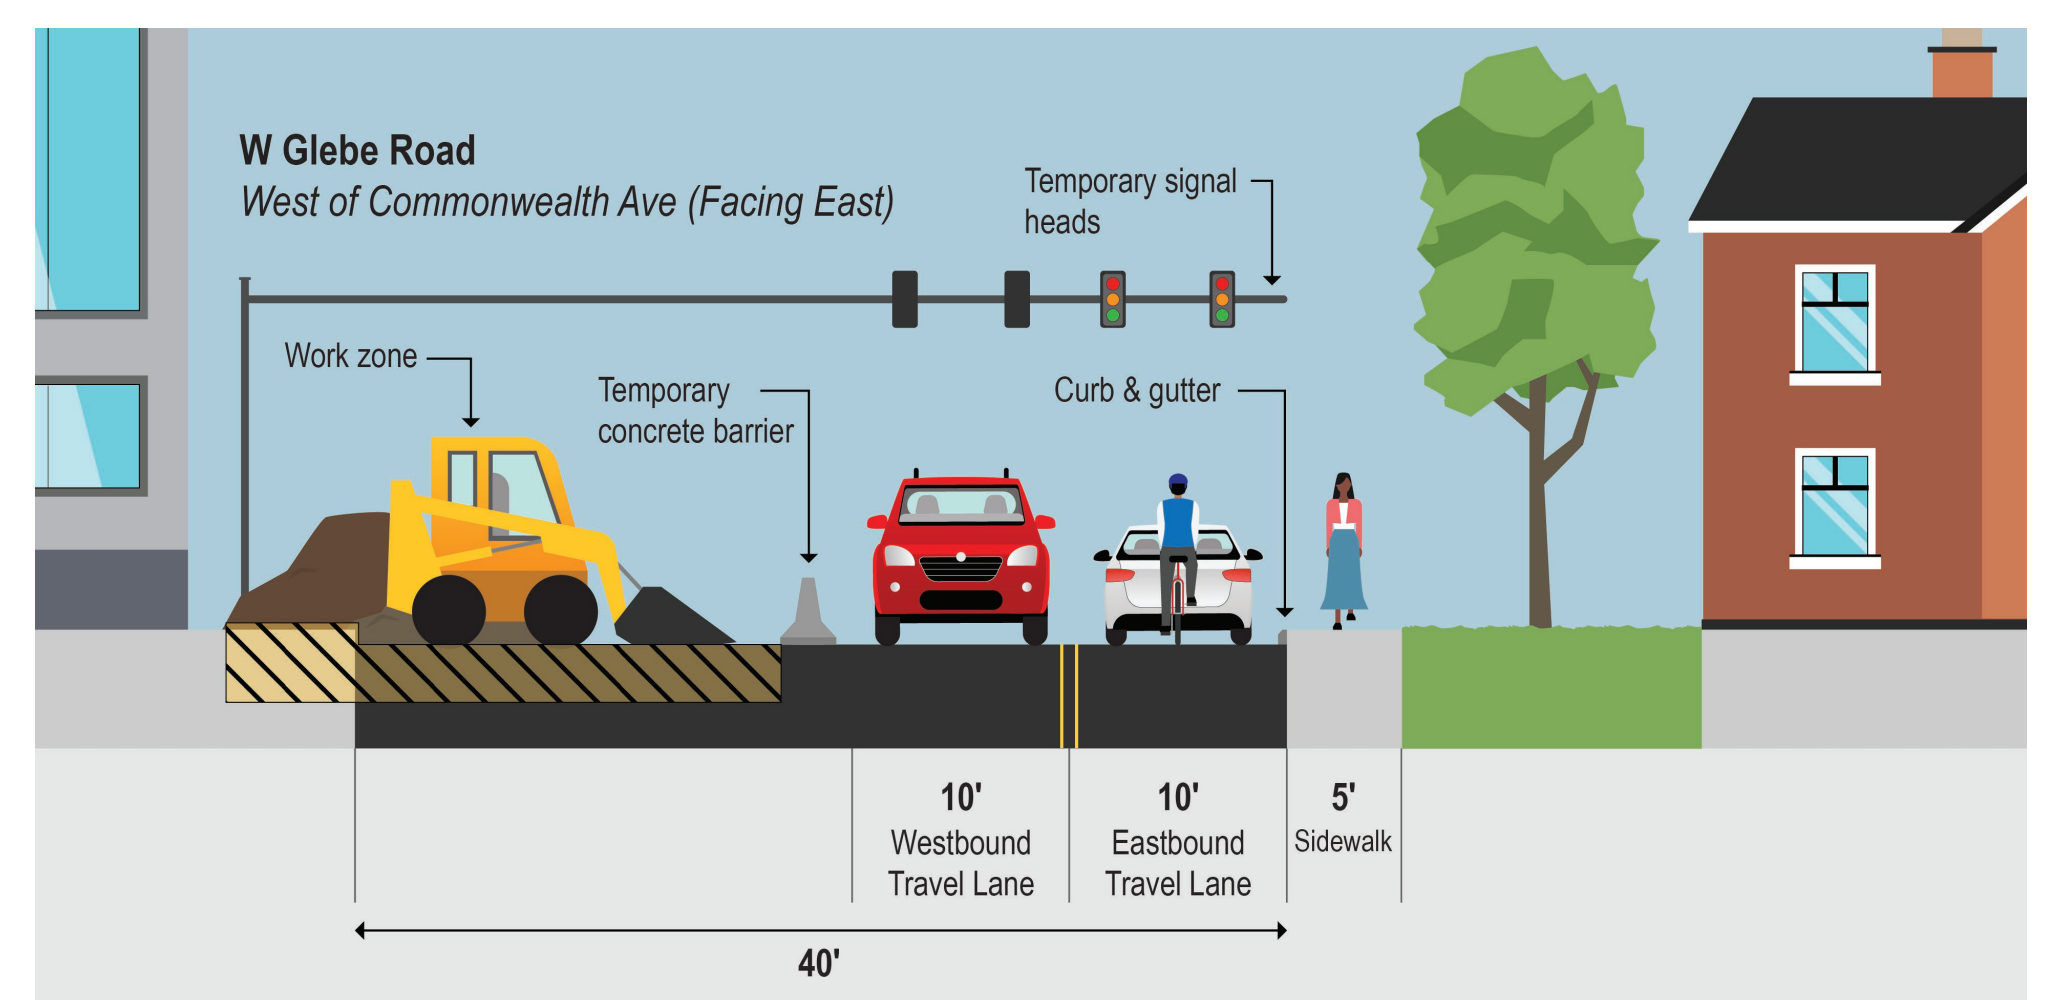

Construction Impacts

- Vehicles**
 - ▶ Two-way traffic on Commonwealth Ave using the west side of the road; traffic signals will be shifted
 - ▶ Two-way traffic on E Glebe Rd using the south side of the road; traffic signals will be shifted
- Pedestrians**
 - ▶ Sidewalk on the east side of Commonwealth Ave and the north side of E Glebe Rd will be closed
 - ▶ Pedestrian crossing at the intersection will be re-routed to the west and south sides of the intersection

- Parking**
 - ▶ No parking on both sides of Commonwealth Ave
 - ▶ No parking on the south side of E Glebe Rd
- Bicycles on Road** - bike lanes will be closed. Bicyclists will share the lane with vehicles

Estimated Duration of Construction

